

Canon

 Corporate
Systems



imageRUNNER®
400V



imageRUNNER®
400V

BOOST YOUR PRODUCTIVITY WITH ADVANCED DIGITAL COPYING TECHNOLOGY

If your business is like most, you need a high-performance copier that can deliver the advanced features and speed needed to boost your productivity. That's why Canon designed the imageRUNNER 400V device. Offering quick copy speeds of up to 40 pages per minute and a host of digital-enabled features, you'll see dramatic improvements to your office productivity.

Its time-saving and memory-enabled functions will allow you to spend more time doing your job and less time waiting at the device. With Scan-Once-Print-Many technology, you can enter a job once and output multiple copies while reducing wear and tear on your originals. The system also offers an array of image editing and image quality settings to make your work look its best. And, through its large, touch-screen LCD panel, the imageRUNNER 400V device provides quick and easy access to all the advanced features.

The imageRUNNER 400V device offers an optional duplexing automatic document feeder that handles both two-sided and different-size originals, and its generous paper capacity means you'll spend less time reloading paper. You'll also save time, paper, and file space with the standard Automatic Trayless Duplexing capability. To complete the job, the optional Finisher-E1 offers stacking, collating, and stapling functions so that your work is ready for distribution in no time.

The Canon imageRUNNER 400V device gives you the high-quality productivity and reliability you'd expect from the industry leader.

THE imageRUNNER 400V DEVICE IS THE CHOICE FOR YOUR MID-VOLUME COPYING NEEDS

Key Features


Ease-of-use: A large, easy-to-use touch-sensitive display employs simple graphics to give users step-by-step guidance through all the advanced features.

Productive Speed: In addition to its 40-page-per-minute copy speeds, Scan-Once-Print-Many (SOPM) technology scans a page once, then prints copies continuously at full-rated speed for 100% productivity!

High Reliability: The imageRUNNER 400V device provides dependable, reliable use for the long run. Standard Automatic Trayless Duplexing decreases the chances of jamming during two-sided copying so you can stay focused on other tasks.

Configuration Flexibility: Choose the options that facilitate document-feeding, increase paper capacity, and deliver professional-looking output for your business needs.

High Productivity: The system offers a wealth of features that save time, reduce costs, and enhance image quality to help your business gain a competitive advantage.

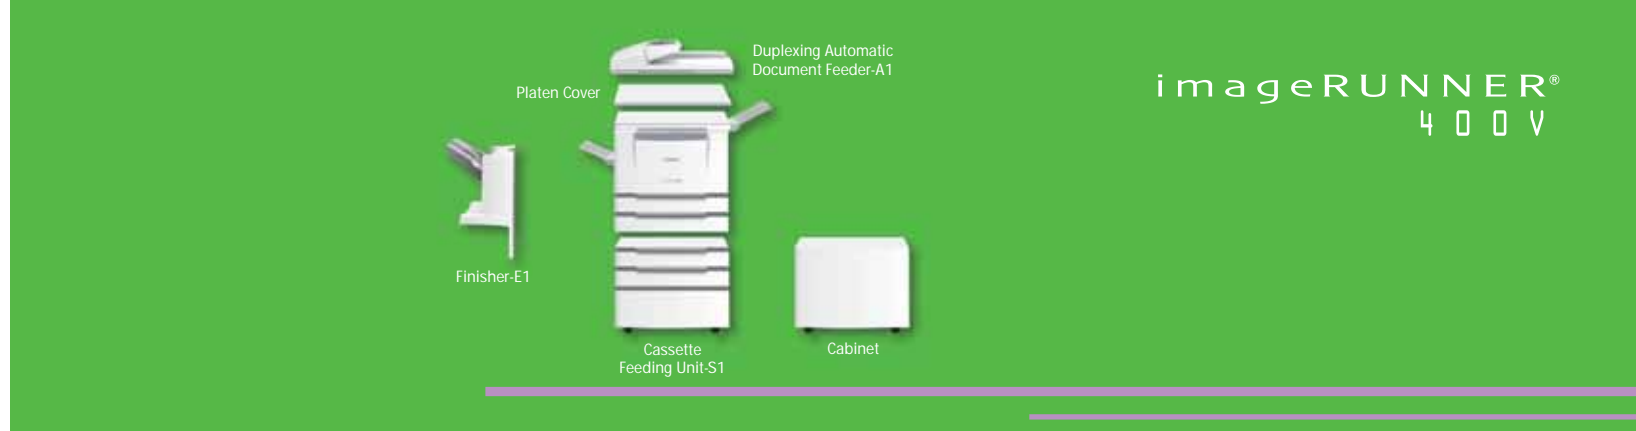

imageRUNNER 400V Specifications

Type:	Digital Multifunction Imaging System
Imaging System:	Laser Dry Electrostatic Transfer
Developing System:	Dry Monocomponent Toner Projection
Fixing System:	Heat Roller Method
Acceptable Originals:	Sheet, books, 3-dimensional objects (up to 4.4 lb. Bond or 2kg)
Copy Speed:	40 cpm (Letter) 30 cpm (Letter-R) 23 cpm (Legal) 19 cpm (11" x 17")
Image Server Memory:	Standard 32MB
First-copy-out Time:	6 Seconds from DADF or Less
Warm-up Time:	92 Seconds or Less
Multipage Speed:	40 ppm
Resolution:	600 x 600 dpi
Halftone:	256 Gradations of Gray (Continuous-tone)
Scanner:	CCD, 600-dpi Resolution
Document-handling:	Optional Duplexing Automatic Document Feeder
Document Feeder Capacity:	50 Sheets
Max. Original Size:	11" x 17" (Ledger)
Output Sizes	
Cassette:	Statement to 11" x 17"
Bypass:	4-1/8" x 5-1/8" to 11" x 17"
Paper Supply	
Standard:	Dual Front-loading Cassettes (500 Sheets Each) 50-sheet Stack Bypass 1,000-sheet Two-cassette Feeder (Total: 2,050 Sheets)
Optional:	
Output Options:	Finisher-E1
Duplexing:	Standard Automatic Trayless
Duplexing Magnification Reduction/Enlargement:	25% to 800% in 1% Increments
Multiple Copies:	1 to 999
Acceptable Paper Weights	
Cassette:	17 lb. to 20 lb. Bond
Bypass:	17 lb. to 32 lb. Bond

Supplies	
Drum:	OPC (Estimated Yield—55,000 Impressions)
Duty Cycle:	120,000 Impressions Per Month
Dimensions (H x W x D):	21-1/4" x 23" x 28-3/8" (539mm x 585mm x 720mm)
Installation Space (W x D):	51" x 28-3/8" (1296mm x 720mm) (with DADF-A1) 47-1/2" x 28-3/8" (1195mm x 720mm) (without DADF-A1)
Weight:	Approx. 183 lb. (83.4kg)
Power Requirements:	120V/60Hz
Power Consumption:	1.5kW

Accessories

Duplexing Automatic Document Feeder-A1 (Optional)	
Acceptable Originals:	Statement to 11" x 17"
Capacity:	50 Sheets (Letter/20 lb.)
Max. Paper Weight:	Up to 28 lb. Bond
Original Replacement Speed:	40 Sheets/Minute
Dimensions (H x W x D):	6-3/8" x 25-3/8" x 20-3/4" (161mm x 645mm x 527mm)
Weight:	Approx. 31 lb. (14.1kg)
Power Source:	24V (From Main Unit)

Cassette Feeding Unit-S1 (Optional)

Number of Cassettes:	Two Cassettes
Paper Capacity:	2 x 500 Sheets (Total: 1,000 Sheets)
Paper Weights:	Up to 20 lb. Bond
Acceptable Paper Size	
Top Drawer:	Statement, Statement-R, Letter, Letter-R
Bottom Drawer:	Statement, Statement-R, Letter, Letter-R, Legal, 11" x 17"
Dimensions (H x W x D):	17-7/8" x 23" x 26-1/4" (453mm x 585mm x 665mm)
Weight:	Approx. 86.4 lb. (39.2kg)
Power Source:	From Main Unit

Cabinet (Optional)	
Dimensions (H x W x D):	17-7/8" x 23" x 26-1/4" (453mm x 585mm x 665mm)
Finisher-E1 (Optional)	
Number of Trays:	One Tray
Tray Capacity:	1,000 Sheets (Letter)
Staple Position:	Top Corner
Staple Capacity:	30 Sheets (Letter) 15 Sheets (Legal, 11" x 17")
Dimensions (H x W x D):	14-1/4" x 21-3/4" x 22-5/8" (363mm x 553mm x 574mm)
Weight:	Approx. 26.4 lb. (12kg)
Power Consumption:	1.5kW or Less
Power Source:	120V/60Hz

*imageRUNNER Factory-Produced New Model:

The imageRUNNER Factory-Produced New Model has been disassembled to a predetermined standard by the original equipment manufacturer, and manufactured with a new serial number. This model contains new, re-conditioned and/or recovered parts and fully meets the manufacturer's new product performance and reliability specifications. (This product contains reconditioned parts and materials.)

CANON and IMAGERUNNER are registered trademarks, and the GENUINE logo is a trademark of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. IMAGEANYWARE is a trademark of Canon. All referenced product names and other marks are trademarks of their respective owners. Specifications subject to change without notice. ©2006 Canon U.S.A., Inc. All rights reserved.

0106R-IR400V-PDF-NW

Canon
image**ANYWARE**

1-800-OK-CANON
www.usa.canon.com

Canon U.S.A., Inc.
One Canon Plaza
Lake Success, NY 11042

